



**Primatech®**  
FASTENING SYSTEM FOR HARDWOOD FLOOR

## Optional **TRAK-EDGE**

### ADAPTER PLATE FOR FACTORY FINISHED FLOORING

Factory finished flooring is constantly gaining market share. Improved milling technology reduces overwood, allowing manufacturers to offer more square and micro-beveled products.

**TRAK-EDGE** sets the tool at a perfect position and moves the nailer guide plates away from the delicate top edge.

**TRAK-EDGE** exclusive design features a spring loaded tapping block. When hit, it moves backward to fit tight boards, yet maintaining the nailer in its original position, ready to fire. This method eliminates the need for the installer to pound the boards together with a mallet, that could splinter or damage top edge.

**TRAK-EDGE**, uses 85% of its surface to contact and push against the tongue, dispersing the full force of mallet blow.


**TRAK-EDGE**, ENHANCES INSTALLER'S TECHNICAL CONFIDENCE BY STEADILY INSTALLING FLOORING WITH OUTSTANDING RESULTS.

### Features

- High impact composite base for superior glide and stability
- Short front overhang allows for closer racking
- Exclusive integrated tapping block with spring loaded action
- Cut-away window for precise side match positioning
- Mounts on Primatech H-300, H-330 manual nailers, P-210, P-240 pneumatic nailer and P-220, P-260 pneumatic stapler
- Easy to install

### Model

- A001 3/4" flooring
- A004 9/16"- 5/8" flooring
- A002 1/2" flooring
- Can be custom fitted for solid or engineered flooring from 7/16" to 1" (9 mm to 23 mm)

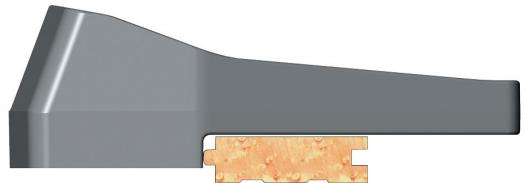

### Specifications

WEIGHT: 19 ounces (0.54 kg)  
WIDTH: 7 1/4" (160 mm)



**Primatech®**

LABORATOIRE PRIMATECH INC.  
1135, rue Jérémie-Fortin  
Québec, QC,  
Canada G1J 1R8

Tel.: 1 (418) 522-7744  
USA / CAN: 1 (800) 363-1962  
Fax: 1 (418) 522-7466  
sales@primatech.ca  
www.primatech.ca